

# ARMSTRONG



## Motor Mounted Centrifugal Pumps

FILE NO:	42.111N
DATE:	April 26, 2010
SUPERSEDES:	42.111N
DATE:	July 20, 2009

**► Casing**


Radially-split casing with center-line discharge can be left in the line while servicing the pump, eliminating needless disconnecting of pipes. Tapped openings are provided for draining and gauge connections. Double volute design where radial loads demand. Center-line discharge allows self venting preventing possible pump failures due to vapor lock.

**► Motor**

The motor is equipped with heavy duty, grease-lubricated ball bearings adequately rated to accommodate impeller radial loads and residual hydraulic thrusts.

**► Impeller**

Balanced impeller designed with balancing chamber and pressure relief holes in the impeller reduce axial thrusts to a minimum, ensuring smooth performance and long life.

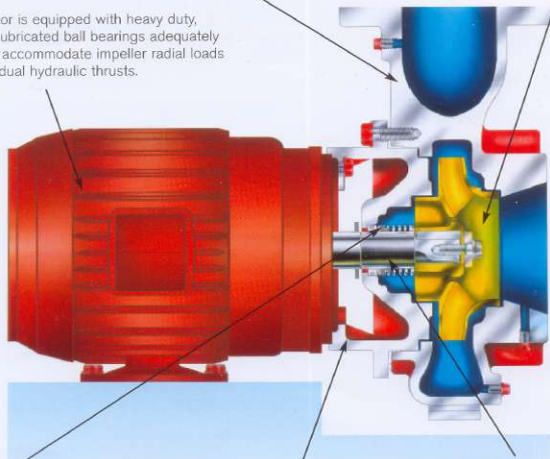**► Mechanical Seal**

Self-lubricating mechanical seal prevents liquid seepage. A carbon face rotating against a stationary O-ring silicone carbide seat provides positive sealing up to full design pressure. Higher temperature construction also available.

**► Bracket**

A heavy cylindrical bracket with 360 degree register on both flanges provides a rigid union of pump and motor and establishes perfect alignment.

**► Shaft**

The impeller is mounted on an extension of the motor shaft with minimum overhang. A shaft sleeve affords protection in the wetted area.

**► Design Features**

- Easy maintenance due to back pull-out design.
- Extensive interchangeability of parts.
- Manufactured and inspected to rigid standards.
- Quiet operation.
- Self venting center-line discharge.
- Confined casing gasket.
- Drilled and tapped gauge connections are standard on suction and discharge ports.
- Mount with motor feet, or motor and pump feet for convenience.

# Motor Mounted Centrifugal Pumps

## ► Materials of Construction

Pump	Flange Rating	Motor Frame	Construction	Casing	Impeller	Capscrew (Impeller)	Washer (Impeller)	Gasket (Casing)	Adapter Bracket	Motor Shaft	Shaft Sleeve	Water Slinger	Seal Washer	Seal Seat	Seal Hardware	Seal Elastomer	Seal Spring
	4280	PN16 JM/JP	BF	CI	BZ	SS-5	SS-2	F	CI	S	S	BR	N	C	SiC	SS-2	EP
PN16 JM/JP		AI	CI	CI	SS-5	SS-2	F	CI	S	S	SS-5	N	C	SiC	SS-2	EP	SS-5
PN16 JM/JP		AB	BZ	BZ	SS-5	SS-2	F	BZ	S	BR	N	C	C	SiC	SS-2	EP	SS-5
PN25 JM/JP		DBF	DI	BZ	SS-5	SS-2	F	DI	S	BR	N	C	C	TC*	SS-2	EP	SS-5

\* Silicone Carbide seals supplied on 1.25" diameter shaft pumps.

Materials of Construction Code		Materials Specification					
BF	- Bronze Fitted	BR	- Hard Brass Tubing ASTM B111.687	C	- Carbon	S	- Carbon Steel
AI	- All Iron	BZ	- Cast Bronze ASTM B584 Grade C84400	DI	- Cast Ductile Iron ASTM A536 Grade 65-45-12	SiC	- Silicone Carbide
AB	- All Bronze	CI	- Cast Iron ASTM A48 Class 30	EP	- EPDM elastomer	SS-2	- ASTM A564 Type 18-8
DBF	- Bronze Fitted , Ductile Casing and Adapter Bracket			F	- Fiber	SS-5	- AISI 1010-1018 Type 316
						TC	- Tungsten Carbide

## ► Pressure/Temperature Parameters\*

- Cast Iron - PN16 flanges  
Pressure up to 16 bar (232 PSI)  
Temperature upto 107°C (225°F)
- Ductile Iron - PN25 flanges  
Pressure up to 17 bar (250 PSI)  
Temperature upto 121°C (250°F)

\*Please view AceOnline or submittal data for full details

### Notes:

- Hydrostatic test pressure at ambient temperature is 150% maximum working pressure.
- All values are based on clear, clean water. Values may change with other liquids.

## ► Typical Specifications

### Pumps - Horizontal - Motor Mounted

1.0 Provide Armstrong single stage, single end suction, motor mounted centrifugal pumps, with rising head characteristics to pump shut off.

Refer to the schedule for pump flows and heads and motor speed, efficiency, enclosure and power requirements.

2.0 The pumps shall be Armstrong Series 4280 motor mounted horizontal end suction pump.

3.0 Pump Construction:

3.1 Pump casing shall be cast iron, suitable for 16 bar (232 PSI) working pressure and Ductile Iron for pressures to 17 bar (250 PSI). The casing shall be hydrostatically tested to 150% maximum working pressure

The casing shall be radially split to allow removal of the rotating element without disturbing the pipe connections.

The casing shall be equipped with a drilled and tapped drain connection. Suction and discharge connections shall be provided with drilled and tapped pressure gauge connections.

3.2 Pump impeller shall be fully enclosed type. Dynamically balanced.


3.3 Provide a shaft sleeve, extending the full length of the mechanical seal area.

3.4 Mechanical Seal shall be single spring inside type with carbon face rotating against a silicone carbide O-ring mounted seat. EPDM elastomer with stainless steel spring and hardware shall be provided.

4.0 Motor power requirements shown on the pump schedule are the minimum acceptable and have been sized for continuous operation without exceeding the full load nameplate rating over the entire pump curve, exclusive of service factor.

## Need to reduce space requirements and installation costs?


### ► Base mounted



Base mounted pump with Suction Guide and Flo-Trex valve eliminates cost and space of:

- Suction:
  - Y-strainer,
  - Long radius elbow,
  - Min. straight pipe run.
- Discharge:
  - Check valve,
  - Isolating valve,
  - Throttling valve.


### ► Vertical In-Line



Vertical In-Line with Suction Guide and Flo-Trex valve eliminates cost and space of all the items listed under base mounted pump, plus the following:

- Inertia base with spring mounts,
- Long radius elbow,
- Flexible pipe connectors,
- Grouting,
- Field alignment,
- Split couplings available for ease of mechanical seal replacement.

### ► dualARM



*dualARM* Vertical In-Line incorporates two pumps in a casing with single inlet and outlet connections. Enables standby or parallel operation with only one set of

piping. Casing design and port valves allow one pump to be removed for service with the second pump still operating. When installed with a Suction Guide and Flo-Trex valve the *dualARM* represents the greatest Life Cycle Value in today's commercial HVAC market.

**ARMSTRONG** 